


© Copyright
This drawing and any design herein is the copyright of the
Consultants and must not be reproduced without their written
consent.

All drawings remain the property of the Consultants.

LEGEND:

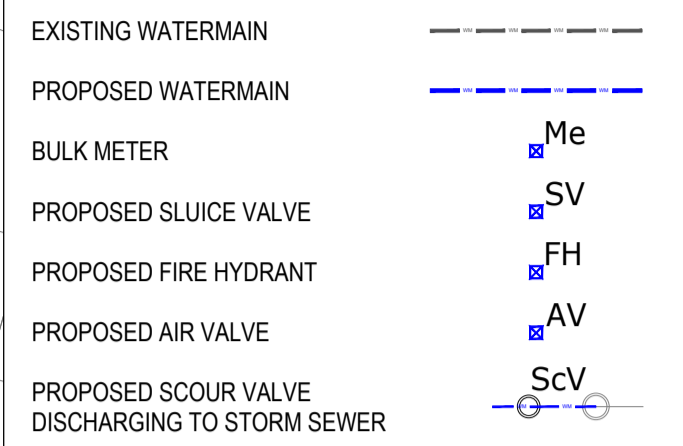

NOTES:

The water supply system is to be constructed in accordance with Irish Water's Code of Practice for Water Infrastructure (IW-CDS-5020-03) and Irish Water's Water Infrastructure Standard Details (IW-CDS-5020-01).

Construction of the water supply system shall ensure the required separation distances as specified in Section 3.5 and Section 3.6 of IW-CDS-5020-03.

Watermains to be HDPE SDR17 pipes in accordance with Section 3.9 of IW-CDS-5020-03.

Water service connections to individual housing units to be 20mm nominal bore in accordance with Section 3.9 of IW-CDS-5030-03.

Sluice valve chambers shall be as per STD-W-15.

Hydrant chambers shall be as per STD-W-18.

Rev.	Suit.	Description	Drawn	Chkd	Date
C01	A1	Issued for planning	TD	TF	07.02.24
P06	S3	150mm Ø spine main extended through development. Service connections shown in a straight line.	RS	TF	07.02.24
P05	S3	Issued for Design Acceptance. Minor revisions to Architects layout.	RS	TF	30.01.24
P04	S3	Minor revisions to layout	RS	TF	18.10.23
P03	S3	Second Connection to Public Main Added	DOB	TF	29.08.22
P02	S3	Service Connections Added	DOB	TF	22.08.22
P01	S3	Issued for Design Acceptance	DOB	TF	11.08.22

Client



Client's Representative:



Dublin | Cork | Castlebar
info@jbbary.ie

Project
RESIDENTIAL DEVELOPMENT AT
THE SPA GLEN, MALLOW, CO. CORK

Drawing Title
PROPOSED WATERMAIN LAYOUT
(SHEET 1)

Drawn by: DOB Date: 10.08.22

Checked by: TF Date: 10.08.22

Approved by: TF Date: 10.08.22


Internal Project REF: JBB: 2201

Scales: PLANNING

Stage: 1:500 @ A1, 1:1000 @ A3

Drawing No.: 22201-JBB-XX-XX-DR-CU-00021

Revision C01 Suitability Code A1

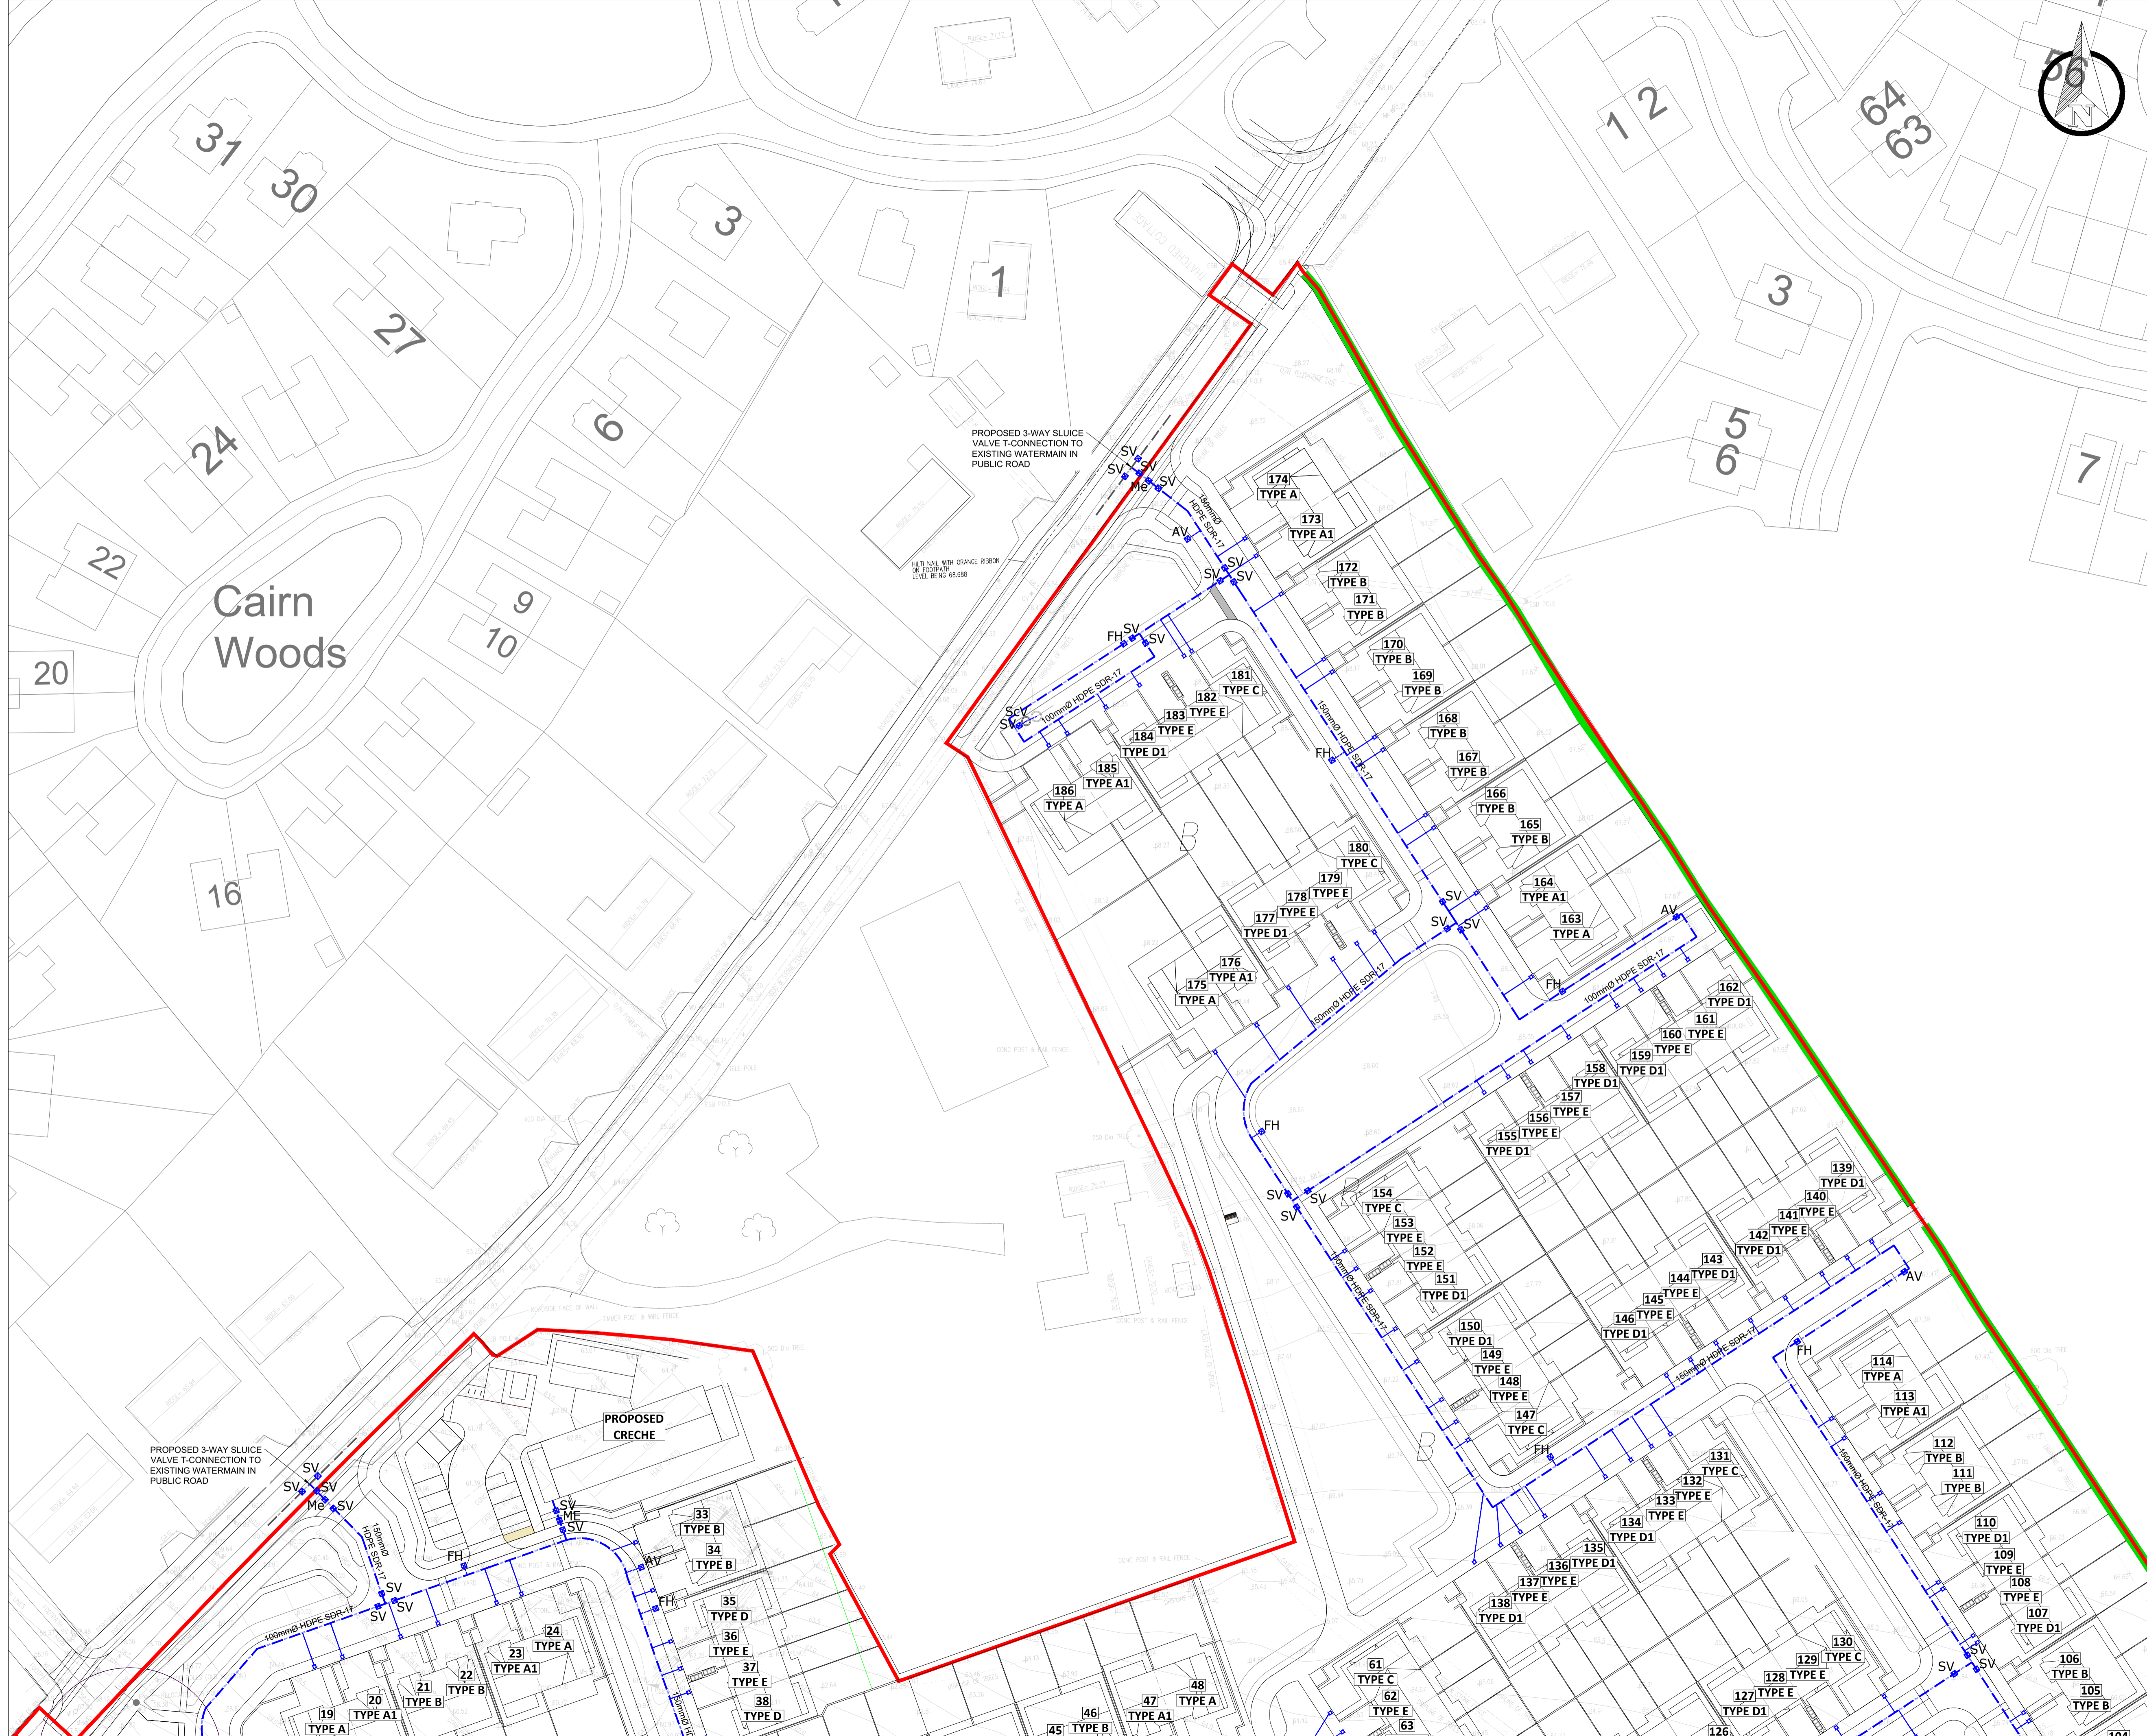

File Name: R:122 Projects\22201 - Ballyniner Site Development 2022\00_WIP\DWG\22201-JBB-XX-XX-DR-CU-00021_Proposed_Watermain_Layout_(Sheet_1)_C01.dwg